





1

2

3

4

5

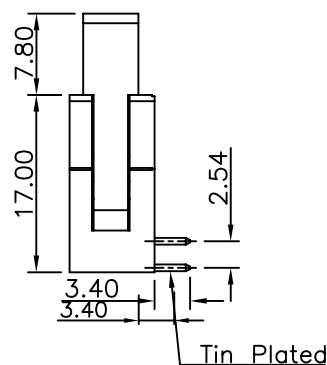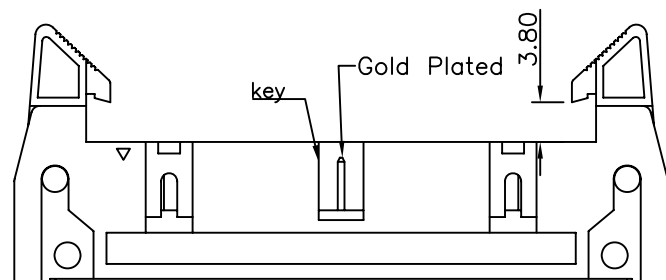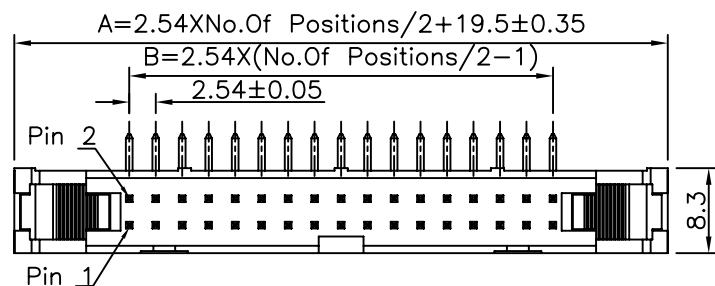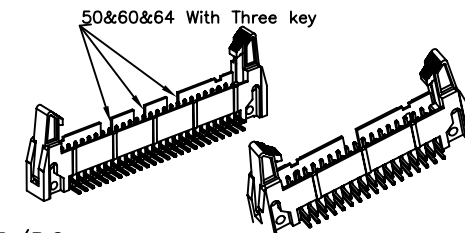

Specifications:

Current Rating:3.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:20m ohm. Max.

Insulation Resistance:1,000M ohm. Min

Withstanding Voltage:600V AC For One Minute

Operating Temperature Range:-40°C ~ +105°C

Material and Finish

Insulator: PBT (UL94V-0)

Insulator Color:Black

Contact:Copper Alloy

Finish:Gold Plated

How To Order

SHR254-XXG-01-XX

Blank:6~40 Pin With one Key

1K:50~64 Pin With one Key

3K:50~64 Pin With Three Key

Short Ejector

Gold Plated

No.of Positions


R/A Type

Notes:

No. Of Positions 50~64 With Three Key

All Other Pin With One Key

No. of Positions	Dim A	Dim B	No. of Positions	Dim A	Dim B	Note
6	27.12	5.08	26	52.52	30.48	
8	29.66	7.62	30	57.60	35.56	
10	32.20	10.16	34	62.68	40.64	
12	34.74	12.70	40	70.30	48.26	
14	37.28	15.24	50	83.00	60.96	1K&3K
16	39.82	17.78	60	95.70	73.66	1K&3K
20	44.90	22.86	64	100.78	78.74	1K&3K
24	49.98	27.94				

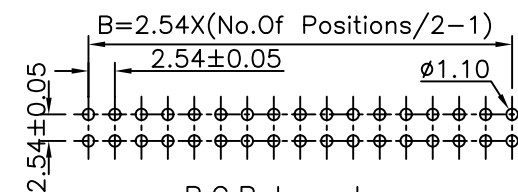

P.C.B Layout

RoHS Compliant

E				DRAWN: WGL	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15		DESCRIPTION: 2.54mm Shrouded Header With Short Ejector Right Angle Type	SIZE A4
D				CHECKED: Jeremy Liu	UNIT: MM SCALE:2:1			
C				APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: SHR254-XXG-01		
B					PROJECTION:			
A	14-Jul-2008	(H0030)	WGL					
REV	DATE	FILE	BY					