


Specifications:

Current Rating:15.0A AC/DC  
 Voltage Rating:300V AC/DC  
 Contact Resistance:20m ohm Max  
 Insulation Resistance:500M ohm Min.  
 Withstanding Voltage:2.000V AC For One Minute  
 Operating Temperature Range:-40°C ~ +105°C  
 Wire Range:28~14 AWG (1.5mm<sup>2</sup>)  
 Material and Finish  
 Insulator:High Temp. Plastic(Nylon66 UL94V-0)  
 Contact Material:Brass With Tin Plated  
 Terminal Screw:Steel Yellow Chromated Zinc  
 Wire Cage:Brass Nickel Plated  
 How To Order  
 TBRP508-XX

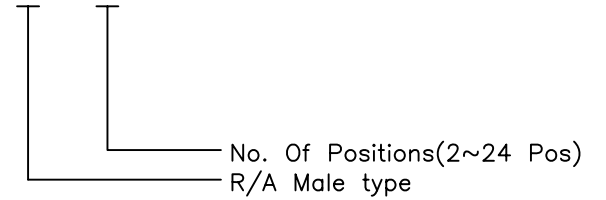

A  
B  
C

D

E				DRAWN: WGL	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15		DESCRIPTION: 5.08mm Terminal Block R/A Male Type	SIZE <b>A4</b>
D				CHECKED: Jeremy Liu	UNIT: MM SCALE:2:1			
C				APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: TBRP508-XX		
B					PROJECTION:			
A	14-Jul-2015	(H0081)	WGL					
REV	DATE	FILE	BY					