


Specifications:

Current rating: 1.5A AC, DC
 Voltage rating: 30V AC, DC
 Contact resistance: 30m ohm max.
 Insulation resistance: 1,000M ohm min.
 Withstanding voltage: 600V AC/minute
 Operating Temperature range: -40°C to +85°C
 Material:

Insulator: High Temp Plastic (UL94V-0)
 Standard Color:Black
 Contact: Copper Alloy
 Finish:Selective Gold Plated

How To Order
 UBPAR-04-XX

WH:White
 BK:Black
 No. Of Positions
 Plug A R/A Type

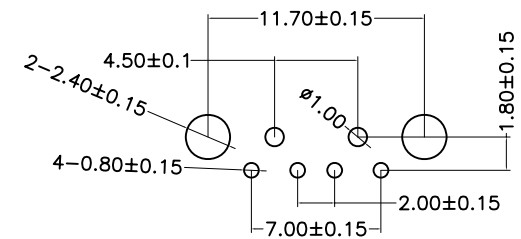

RECOMMENDED P.C.B LAYOUT

RoHS Compliant

DRAWN:
Huali

CHECKED:
Lily Chou

APPROVAL:
Ken Wu

GENERAL TOLERANCE:
 .X=±0.2
 .XX=±0.15

UNIT: MM

SCALE:1:1

SHEET: 1 / 1

PROJECTION:



DESCRIPTION:
USB A Plug 4P R/A Dip Type

PART NO:
UBPAR-04-XX

SIZE
A4

A	22-Aug-2012	(PC0001)	Huali
REV	DATE	FILE	BY