

Specifications:

Current Rating:1.0A AC,DC
 Voltage Rating:30V AC,DC
 Contact Resistance:20M Ohm Max
 Insulation Resistance:1,000M Ohm Min
 Withstanding Voltage:750V AC/Minute
 Operating Temperature Range:-40°C to +105°C
 Materials:



Insulator:High Temp.Plastic (LCP UL94V-0)
 Contact:Phosphor Bronze
 Plating:Gold Plated on Contact Area,
 Tin Plated on Solder Tail.

Shell:Brass,Tin Plate


How To Order

UBSBRSM-05-TR

— Tape & Reel
 — No. Of Positions
 — Mini USB Socket B SMT Type

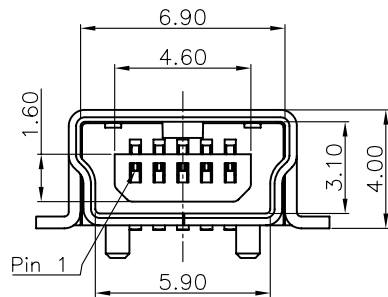

DETAIL A
 SCALE 2/1

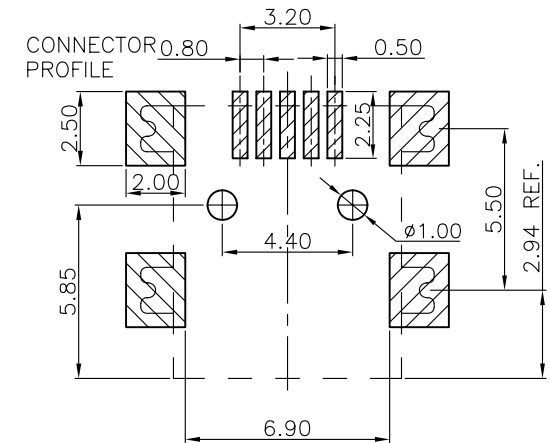

Recommended PCB Layout RoHS Compliant

				DRAWN: Jack Zhou	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15		DESCRIPTION: Mini USB B SMT Type Socket	SIZE A4
E				CHECKED: Ken Wang	UNIT: MM			
D				APPROVAL: Make Hu	SCALE:2:1	PART NO: UBSBRSM-05-TR		
C					SHEET: 1 / 1			
B				PROJECTION: 				
A	20-Jan-2014	(PC0001)	Jack Zhou					
REV	DATE	FILE	BY					