


Specifications:

Current Rating: 3.0A AC/DC  
 Voltage Rating: 250V AC/DC  
 Contact Resistance: 20m Ohm Max  
 Insulation Resistance: 1000M Ohm Min.  
 Withstanding Voltage: 1000V AC/Minute  
 Operating Temperature Range: -40°C To +105°C  
 Material and Finish:  
 Insulator: Nylon 66 (UL94V-0)  
 Insulator Color: Black  
 Contact: Brass  
 Plating: Tin Plated  
 How To Order  
 WF1R254-XXX

T: Tin Plated  
 G: Gold Plated  
 No. Of Contacts  
 R: R/A Type

Dimension:

Circuits	Dimension:		Circuits	Dimension:	
	A	B		A	B
02	2.54	5.08	12	27.94	30.48
03	5.08	7.62	13	30.48	33.02
04	7.62	10.16	14	33.02	35.56
05	10.16	12.70	15	35.56	38.10
06	12.70	15.24	16	38.10	40.64
07	15.24	17.78	17	40.64	43.18
08	17.78	20.32	18	43.18	45.72
09	20.32	22.86	19	45.72	48.26
10	22.86	25.40	20	48.26	50.80
11	25.40	27.94			

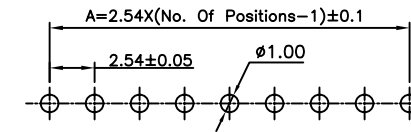

P.C.B. Layout

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X = ±0.20 .XX = ±0.15		DESCRIPTION: 2.54mm Wafer R/A Dip Type	SIZE <b>A4</b>
E								
D				APPROVAL: Chao Peng	SCALE: 1:1	PART NO: WF1R254-XXX		
C					PROJECTION:			
B								
A	22-May-2014	(PC0001)	Ken					
REV	DATE	FILE	BY					