


Specifications:
 Current rating:5.0Amps
 Voltage rating:250V AC,DC
 Contact resistance:10mohm Max
 Insulation resistance:1,000Mohm min.
 Withstanding voltage:1,500V AC;DC
 Operating Temperature range:-25°C ~ +105°C
 Materials:

Insulator:High Temp.Plastic(Nylon 46 UL94V-0)
 Color:Black
 Contact:Copper Alloy
 Plating:Tin Plated
 How to order
 WF1RASM30-XXT-TR

TR:Tape&Reel
 T:Tin Plated
 No.of Positions
 SMD Type
 RA:R/A Single row

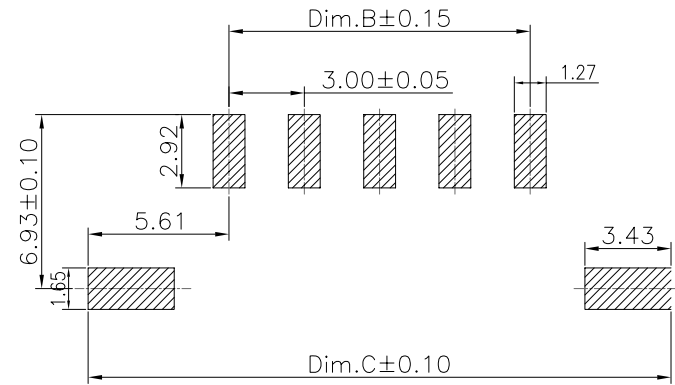

PCB LAYOUT

RoHS Compliant

Positions	Dimension			Positions	Dimension		
	A	B	C		A	B	C
2	9.65	3.00	14.20	8	27.65	21.00	32.20
3	12.65	6.00	17.20	9	30.65	24.00	35.20
4	15.65	9.00	20.20	10	33.65	27.00	38.20
5	18.65	12.00	23.20	11	36.65	30.00	41.20
6	21.65	15.00	26.20	12	39.65	33.00	44.20
7	24.65	18.00	29.20				

F				DRAWN:	Ken
E				CHECKED:	Lily Chou
D				APPROVAL:	Ken
C				Chao Peng	
B					
A	01-SEP-2009	(PC0001)	Ken		
REV	DATE	FILE	BY		

GENERAL TOLERANCE:	.X=±0.20 .XX=±0.15
UNIT:	MM
SCALE:	1:1
SHEET:	1 / 2
PROJECTION:	

		DESCRIPTION:	SIZE
		3.0mm Wafer Single Row R/A SMT Type	A4
PART NO:	WF1RASM30-XXT-TR		

A
B
C
D