


Specifications:
 Current Rating:3.0A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:20mohm Max
 Insulation Resistance:1000Mohm Min.
 Withstanding Voltage:1000V AC/minute
 Operating Temperature Range:-40°C~+85°C
 Material And Finish:
 Insulator:Nylon 66 UL94V-0
 Insulator Color:White
 Contact:Brass
 Plated:Tin Plated
 How To Order:
 WF1V25-XX-XX

WH:White
 BU:Blue
 BK:Black
 YL:Yellow
 No. Of Contacts
 VJ:Straight Type

Circuits	Dim.A	Dim.B	Dim.C	Circuits	Dim.A	Dim.B	Dim.C
2	2.50	2.90	5.00	8	17.50	17.60	20.00
3	5.00	5.10	7.50	9	20.00	20.10	22.50
4	7.50	7.60	10.00	10	22.50	22.60	25.00
5	10.00	10.10	12.50	11	25.00	25.10	27.50
6	12.50	12.60	15.00	12	27.50	27.60	30.00
7	15.00	15.10	17.50	13	30.00	30.10	32.50

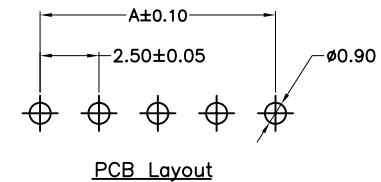

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 2.5mm Wafer Straight Type	SIZE A4
E			Ken	.X=±0.20 .XX=±0.15				
D			CHECKED:	UNIT: MM				
C			Lily Chou	SCALE: 1:1				
B			APPROVAL:	SHEET: 1 / 1	PART NO:	WF1V25-XX-XX		
A	01-SEP-2009	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					