

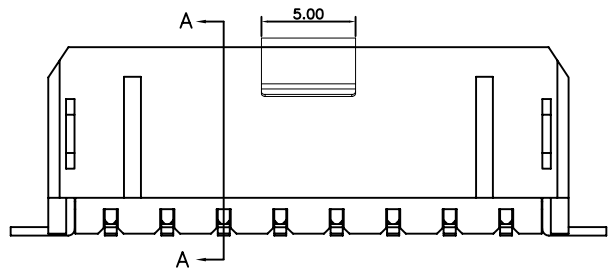



Specifications:
 Current rating:5.0Amps
 Voltage rating:250V AC,DC
 Contact resistance:10mohm Max
 Insulation resistance:1,000Mohm min.
 Withstanding voltage:1,500V AC;DC
 Operating Temperature range:-25°C ~ +105°C
 Materials:

Insulator:High Temp.Plastic(Nylon 9T UL94V-0)
 Color:Black
 Contact:Copper Alloy
 Plating:Tin Plated
 How to order

WF1VASM30-XXT-CR
 CR:Cap&Tape&Reel
 T:Tin Plated
 No.of Positions
 SMD Type
 VA:Straight Single row



Positions	Dimension		Positions	Dimension	
	A	B		A	B
2	9.65	3.00	8	27.65	21.00
3	12.65	6.00	9	30.65	24.00
4	15.65	9.00	10	33.65	27.00
5	18.65	12.00	11	36.65	30.00
6	21.65	15.00	12	39.65	33.00
7	24.65	18.00			

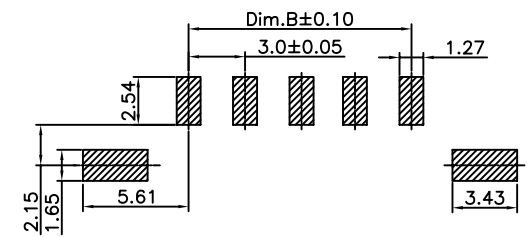

PCB LAYOUT

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION:	SIZE
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM	3.0mm Wafer Single Row SMT Type	A4	
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 2	PART NO:	WF1VASM30-XXT-CR	
A	01-SEP-2009	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					