
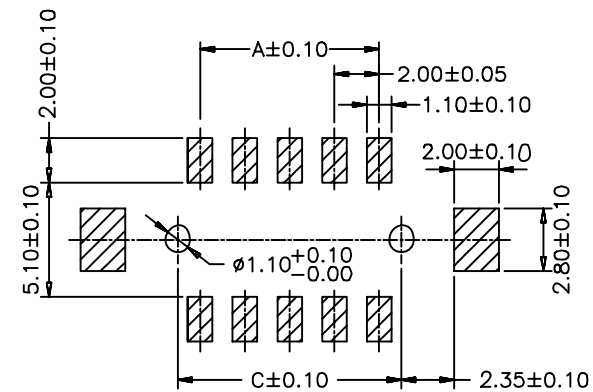


Specifications:

Current rating: 2.0A AC, DC
 Voltage rating: 125V AC, DC
 Contact resistance: 20m ohm. Max
 Insulation resistance: 1000M ohm. Min
 Withstanding voltage: 500V AC/minute
 Operating temperature range: -40°C ~ +85°C
 Material:

Insulator: Nylon 6T (UL94V-0)
 Default Color: Beige
 Contact: Brass
 Plated: Tin Plated
 How To Order:
 WF1VSM20-XX



P.C.B LAYOUT

Dimension:

Circuits	Dimension:			Circuits	Dimension:		
	A	B	C		A	B	C
04	2.00	8.50	4.00	20	18.00	24.50	20.00
06	4.00	10.50	6.00	22	20.00	26.50	22.00
08	6.00	12.50	8.00	24	22.00	28.50	24.00
10	8.00	14.50	10.00	26	24.00	30.50	26.00
12	10.00	16.50	12.00	28	26.00	32.50	28.00
14	12.00	18.50	14.00	30	28.00	34.50	30.00
16	14.00	20.50	16.00	32	30.00	36.50	32.00
18	16.00	22.50	18.00	34	32.00	38.50	34.00

F				DRAWN: Ken	GENERAL TOLERANCE: .X = ±0.20 .XX = ±0.15	HOYATO 东莞好亚通电子厂 Connector supplies	DESCRIPTION: 2.0mm Wafer Straight SMT Type	SIZE A4
E								
D				CHECKED: Lily Chou	UNIT: MM	PART NO: WF1VSM20-XX		
C					SCALE: 1:1			
B				APPROVAL: Chao Peng	SHEET: 1 / 1			
A	12-Oct-2014	(CJ01)	Ken		PROJECTION:			
REV	DATE	FILE	BY					