


Specifications:
 Current rating: 2.0A AC, DC
 Voltage rating: 125V AC, DC
 Contact resistance: 20m ohm Max
 Insulation resistance: 1000M ohm Min
 Withstanding voltage: 500V AC/minute
 Operating temperature range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Material:




Insulator: Nylon 9*T (UL94V-0)
 Default Color: Beige
 Contact: Brass
 Plated: Tin Plated
 How To Order:
 WF2VSM20-XX-CR

Cap+Tape& Reel
 No. of Contacts
 VSM: Straight SMT Type

Dimension:

Circuits	Dimension:		Circuits	Dimension:	
	A	B		A	B
02	2.00	8.00	10	18.00	24.00
03	4.00	10.00	11	20.00	26.00
04	6.00	12.00	12	22.00	28.00
05	8.00	14.00	13	24.00	30.00
06	10.00	16.00	14	26.00	32.00
07	12.00	18.00	15	28.00	34.00
08	14.00	20.00	16	30.00	36.00
09	16.00	22.00			

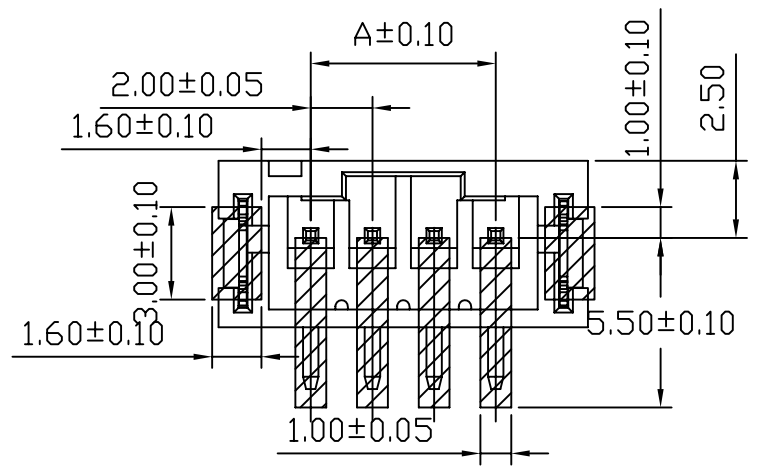

F				DRAWN: Ken	GENERAL TOLERANCE: .X = ± 0.20 .XX = ± 0.15
E					
D				CHECKED: Lily Chou	UNIT: MM
C					SCALE: 1:1
B				APPROVAL: Chao Peng	SHEET: 1 / 1
A	12-Sep-2018	(PC0001)	Ken		PROJECTION:
REV	DATE	FILE	BY		

DESCRIPTION:	2.0mm Wafer Straight SMT Type
PART NO:	WF2VSM20-XX-CR



SIZE
A4