

Specifications:


Current rating:2.0A AC,DC
 Voltage rating:125V AC,DC
 Contact resistance:20m ohm.Max
 Insulation resistance:1000M ohm.Min
 Withstanding voltage:500V AC/minute
 Operating temperature range:-40°C~+85°C
 Material:

Insulator:Nylon 9*T (UL94V-0)
 Defaul Color:Beige
 Contact:Brass
 Plated:Tin Plated
 How To Order:

WF2VSM20-XX-TR
 — Tape& Reel
 — No. of Contacts
 — SM:SMT Type

Dimension:

Circuits	Dimension:		Circuits	Dimension:	
	A	B		A	B
02	2.00	8.00	10	18.00	24.00
03	4.00	10.00	11	20.00	26.00
04	6.00	12.00	12	22.00	28.00
05	8.00	14.00	13	24.00	30.00
06	10.00	16.00	14	26.00	32.00
07	12.00	18.00	15	28.00	34.00
08	14.00	20.00	16	30.00	36.00
09	16.00	22.00			

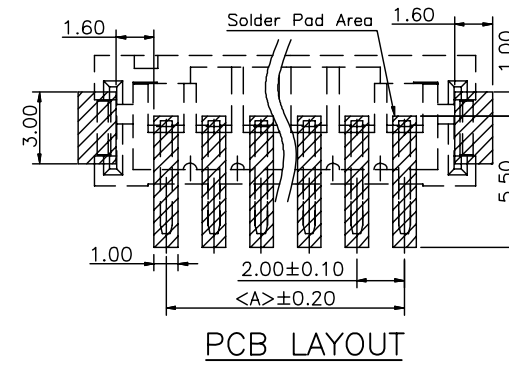

PCB LAYOUT

F			
E			
D			
C			
B			
A	12-Oct-2014	(CJ01)	Ken
REV	DATE	FILE	BY

DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15
CHECKED: Lily Chou	UNIT: MM
APPROVAL: Chao Peng	SCALE: 1:1
	SHEET: 1 / 1
	PROJECTION:

DESCRIPTION: 2.0mm Wafer Straight SMT Type	SIZE
PART NO: WF2VSM20-XX-TR	A4

A
B
C
D