






06~15P Double Hole

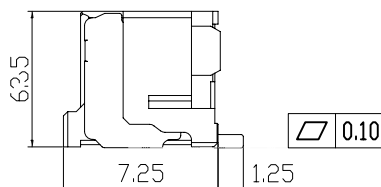


02~05P Single Hole

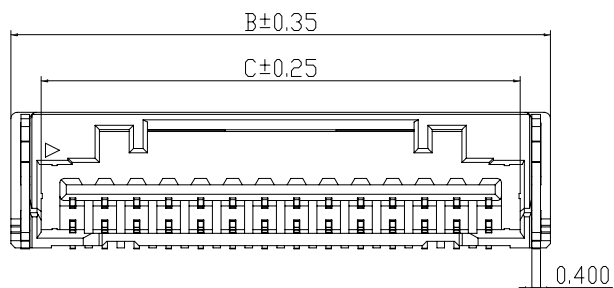


02~05P 有盖子

Specifications:
 Current Rating: 2.0A AC/DC
 Voltage Rating: 100V AC/DC
 Contact Resistance: 20m Ohm. Max.
 Insulation Resistance: 500M Ohm. Min.
 Withstanding Voltage: 500V AC/minute
 Operating Temperature Range: -25°C~+85°C
 Material and Finish:
 Insulator: High Temp. Plastic (LCP UL94V-0)
 Insulator Color: Natural
 Contact: Brass
 Plating: Tin Plated
 How To Order:
 WF5RSM15-XXT-LK
 — With Lock
 — T: Tin Plated
 — No. of Position
 — RSM: R/A SMT Type

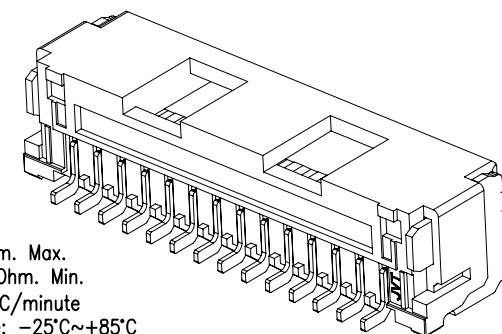

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	1.50	7.30	4.45	09	12.00	17.80	14.95
03	3.00	8.80	5.95	10	13.50	19.30	16.45
04	4.50	10.30	7.45	11	15.00	20.80	17.95
05	6.00	11.80	8.95	12	16.50	22.30	19.45
06	7.50	13.30	10.45	13	18.00	23.80	20.95
07	9.00	14.80	11.95	14	19.50	25.30	22.45
08	10.50	16.30	13.45	15	21.00	26.80	23.95

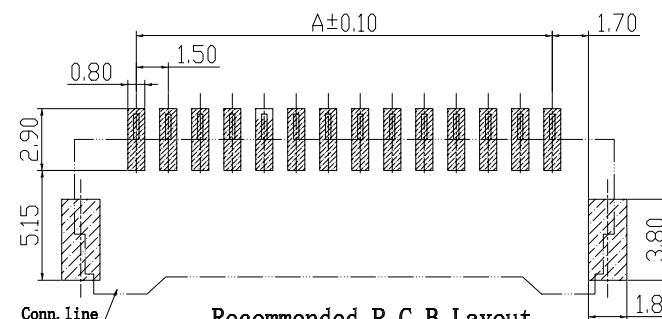

Recommended P.C.B Layout
 General Tolerance ±0.05

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		SIZE
E				Ken	.X=±0.20 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION:	A4
C				Lily Chou	SCALE: 1:1		
B				APPROVAL:	SHEET: 1 / 1	PART NO:	A4
A	02-Aug-2021	(H0079)	Ken	Chao Peng	PROJECTION:		
REV	DATE	FILE	BY				