


Specifications:
 Current Rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m Ohm Max
 Insulation Resistance:1000M Ohm Min.
 Withstanding Voltage:1000V AC/Minute
 Operating Temperature Range:-40°C To +105°C
 Material and Finish:
 Insulator:Nylon 66 (UL94V-0)
 Insulator Color:Black
 Contact:Brass
 Plating:Tin Plated
 How To Order
 WFDR254-XXX

T: Tin Plated
 G: Gold Plated
 No.Of Contacts
 DR: Double Row R/A Type

Dimension:

Circuits	Dimension:		Circuits	Dimension:	
	A	B		A	B
04	2.54	5.08	24	27.94	30.48
06	5.08	7.62	26	30.48	33.02
08	7.62	10.16	28	33.02	35.56
10	10.16	12.70	30	35.56	38.10
12	12.70	15.24	32	38.10	40.64
14	15.24	17.78	34	40.64	43.18
16	17.78	20.32	36	43.18	45.72
18	20.32	22.86	38	45.72	48.26
20	22.86	25.40	40	48.26	50.80
22	25.40	27.94			

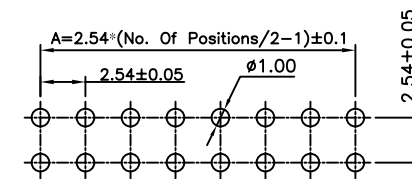

P.C.B. Layout

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 2.54mm Wafer R/A Dip Type	SIZE A4
E				CHECKED: Lily Chou	UNIT: MM			
D					SCALE: 1:1			
C					SHEET: 1 / 1			
B				APPROVAL: Chao Peng	PROJECTION:		PART NO: WFDR254-XXX	
A	22-May-2014	(PC0001)	Ken					
REV	DATE	FILE	BY					