



2 Pin



4 Pin



Specifications:
Current Rating:9.0A AC/DC
Voltage Rating:600V AC/DC
Contact Resistance:10m ohm. Max.
Insulation Resistance:1000M ohm. Min.
Withstanding Voltage:600V AC For One Minute
Operating Temperature Range:−40°C To +105°C
Materials:
Insulator:High Temp. Plastic(Nylon66 UL94V−0)
Insulator Color:White
Contact:Brass
Plating:Tin Plated

How To Order
WFDR42−XX−−PG−01

- 01:Without Flange
- 01:With Peg
- No. Of Contacts
- DR:Double Row Right Angle Type

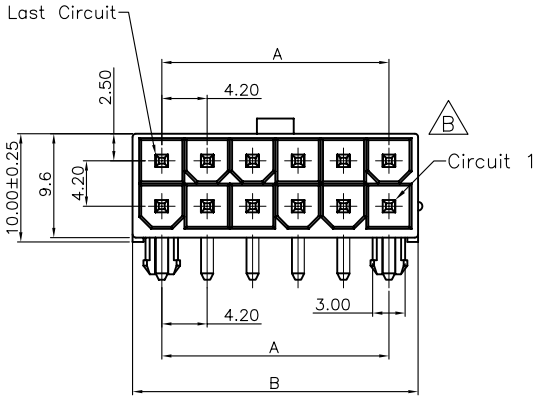

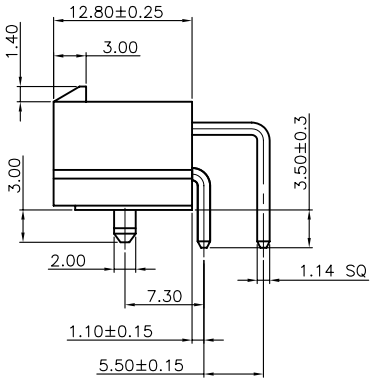

Dimension Iformation:

Circuits	Dim A	Dim B	Circuits	Dim A	Dim B
2	—	5.4	14	25.2	30.6
4	4.2	9.6	16	29.4	34.8
6	8.4	13.8	18	33.6	39.0
8	12.6	18.0	20	37.8	43.2
10	16.8	22.2	22	42.0	47.4
12	21.0	26.4	24	46.2	51.6



2 Pin



4 Pin

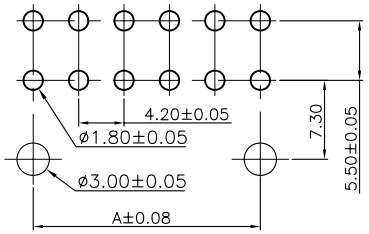

RECOMMENDED P.C.B LAYOUT

RoHS Compliant

REV	DATE	FILE	BY
F			
E			
D			
C			
B			
A	22−May−2014	(H0030)	Ken

DRAWN: Ken
CHECKED: Lily Chou
APPROVAL: Chao Peng

GENERAL TOLERANCE:
.X=±0.20
.XX=±0.15

UNIT: MM
SCALE: 1:1
SHEET: 1 / 2
PROJECTION:

HOYATO Connector supplies

DESCRIPTION: 4.2mm Wafer R/A Type

PART NO: WFDR42−XX−PG−01

SIZE A4