


Specifications:

Current Rating: 3.0A AC/DC
 Voltage Rating: 250V AC/DC
 Contact Resistance: 20m Ohm Max
 Insulation Resistance: 1000M Ohm Min.
 Withstanding Voltage: 1000V AC/Minute
 Operating Temperature Range: -40°C To +105°C
 Material and Finish:
 Insulator: Nylon 66 (UL94V-0)
 Insulator Color: Black
 Contact: Brass
 Plating: Tin Plated
 How To Order
 WFDV254-XXX

T: Tin Plated
 G: Gold Plated
 No. Of Contacts
 DV: Double Row Straight Type

Dimension:

Circuits	Dimension:		Circuits	Dimension:	
	A	B		A	B
04	2.54	5.08	24	27.94	30.48
06	5.08	7.62	26	30.48	33.02
08	7.62	10.16	28	33.02	35.56
10	10.16	12.70	30	35.56	38.10
12	12.70	15.24	32	38.10	40.64
14	15.24	17.78	34	40.64	43.18
16	17.78	20.32	36	43.18	45.72
18	20.32	22.86	38	45.72	48.26
20	22.86	25.40	40	48.26	50.80
22	25.40	27.94			

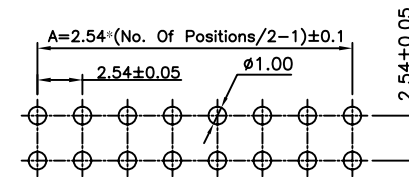

P.C.B. Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION:	SIZE
E				Ken	.X = ±0.20 .XX = ±0.15			
D				CHECKED:	UNIT: MM	2.54mm Wafer Straight Dip Type	A4	
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 1	PART NO:	WFDV254-XXX	
A	22-May-2014	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					