



Specifications:

Current rating:2.0A AC,DC
 Voltage rating:125V AC,DC
 Contact resistance:20m ohm.Max
 Insulation resistance:1000M ohm.Min
 Withstanding voltage:500V AC/minute
 Operating temperature range:-40°C~+85°C
 Material and Finish
 Insulator:High Temp Plastic(Nylon 66 UL94V-0)
 Insulator Color:Gray
 Contact:Brass
 Plated:Tin Plated



How To Order:

WFDVJ20-XX

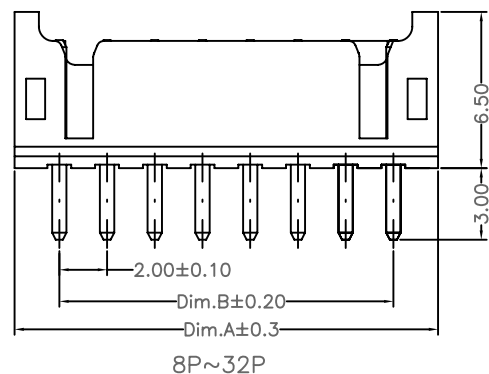

Dimension:

| Circuits | Dim.A | Dim.B | Circuits | Dim.A | Dim.B |
|----------|-------|-------|----------|-------|-------|
| 4 | 6.00 | 2.00 | 20 | 22.00 | 18.00 |
| 6 | 8.00 | 4.00 | 22 | 24.00 | 20.00 |
| 8 | 10.00 | 6.00 | 24 | 26.00 | 22.00 |
| 10 | 12.00 | 8.00 | 26 | 28.00 | 24.00 |
| 12 | 14.00 | 10.00 | 28 | 30.00 | 26.00 |
| 14 | 16.00 | 12.00 | 30 | 32.00 | 28.00 |
| 16 | 18.00 | 14.00 | 32 | 34.00 | 30.00 |
| 18 | 20.00 | 16.00 | | | |

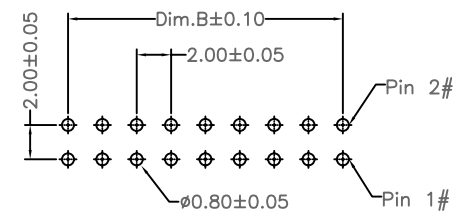

PCB LAYOUT

RoHS Compliant

| | | | | | | | | |
|-----|-------------|--------|-----|------------------------|---|--|---|-------------------|
| F | | | | DRAWN: Ken | GENERAL TOLERANCE: .X=±0.20 .XX=±0.15 | HOYATO 东莞好亚通电子厂 Connector supplies | DESCRIPTION: 2.0mm Wafer Straight Type | SIZE A4 |
| E | | | | | | | | |
| D | | | | CHECKED: Lily Chou | UNIT: MM | PART NO: WFDVJ20-XX | | |
| C | | | | | | | | SCALE: 1:1 |
| B | | | | APPROVAL: Chao Peng | SHEET: 1 / 1 | | | |
| A | 12-Oct-2014 | (CJ01) | Ken | | | PROJECTION: | | |
| REV | DATE | FILE | BY | | | | | |