

Specifications:


Current Rating: 1.0A AC/DC
 Voltage Rating: 50V AC/DC
 Contact Resistance: 40m Ohm. Max.
 Insulation Resistance: 100M Ohm. Min.
 Withstanding Voltage: 500V AC/minute
 Operating Temperature Range: -25°~+85°C
 Material And Finish:
 Insulator:Nylon 66 (UL94V-0)
 Insulator Color:Brown
 Contact:Brass
 Finish:Tin Plated

How To Order:

WFR15-XX
 ————— No. of Position
 ————— R:R/A Type

Dimension:

Circuits	A	B	Circuits	A	B
2	1.50	4.50	8	10.50	13.50
3	3.00	6.00	9	12.00	15.00
4	4.50	7.50	10	13.50	16.50
5	6.00	9.00	11	15.00	18.00
6	7.50	10.50	12	16.50	19.50
7	9.00	12.00	13	18.00	21.00

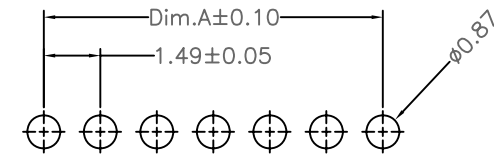

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION:	SIZE
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM	1.5mm Wafer R/A Type	A4	
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 1	PART NO:	WFR15-XX	
A	01-SEP-2013	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					