





1

2

3

4

5

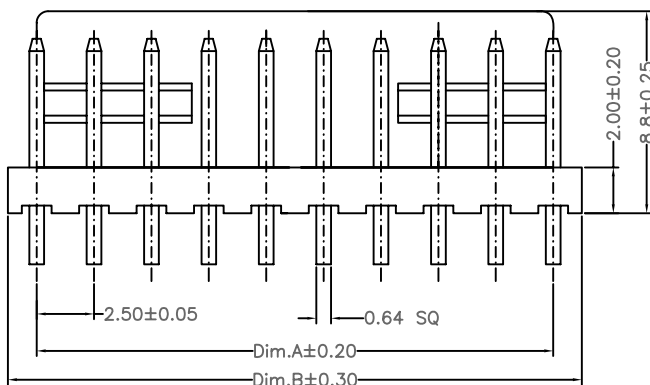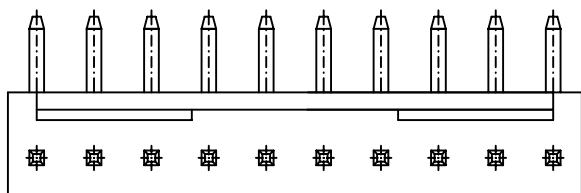

Specifications:

Current Rating:3.0A AC,DC

Voltage Rating:250V AC,DC

Contact Resistance:20mohm Max

Insulation Resistance:1000Mohm Min.

Withstanding Voltage:1000V AC/minute

Operating Temperature Range:-40°C~+105°C

Material and Finish:

Insulator:Nylon 66 (UL94V-0)

Insulator Color:Beige

Contact:Brass

Plating:Tin Plated

How To Order


WFR25-XX

No.Of Contacts

R:Right Angle Type

Dimension:

POS.	Dim A	Dim B	POS.	Dim A	Dim B	POS.	Dim A	Dim B
2	2.50	5.00	9	20.00	22.50	16	37.50	40.00
3	5.00	7.50	10	22.50	25.00	17	40.00	42.50
4	7.50	10.00	11	25.00	27.50	18	42.50	45.00
5	10.00	12.50	12	27.50	30.00	19	45.00	47.50
6	12.50	15.00	13	30.00	32.50	20	47.50	50.00
7	15.00	17.50	14	32.50	35.00			
8	17.50	20.00	15	35.00	37.50			

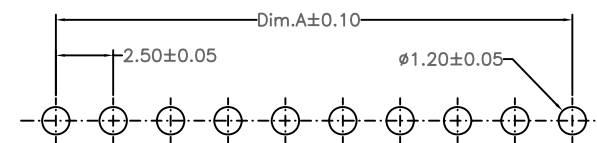

PCB LAYOUT

RoHS Compliant

F			
E			
D			
C			
B			
A	12-Aug-2014	(H0032)	Ken
REV	DATE	FILE	BY

DRAWN:  
Ken

CHECKED:  
Lily Chou

APPROVAL:  
Chao Peng

GENERAL TOLERANCE:

.X=±0.20

.XX=±0.15

UNIT: MM

SCALE: 1:1

SHEET: 1 / 1

PROJECTION:


**HOYATO**  
Connector supplies

DESCRIPTION:

2.5mm Wafer R/A With Lock Type

PART NO:

WFR25-XX

SIZE

**A4**