


Specifications:
 Current Rating:3.0A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:20mohm Max
 Insulation Resistance:1000Mohm Min.
 Withstanding Voltage:1000V AC/minute
 Operating Temperature Range:-40°C~+105°C
 Material and Finish:
 Insulator:Nylon 66 (UL94V-0)
 Insulator Color:Beige
 Contact:Brass
 Plating:Tin Plated
 How To Order
 WFR254-XX

No.Of Contacts
 R:Right Angle Type

Dimension:

Circuits	Dimension:		Circuits	Dimension:	
	A	B		A	B
02	2.54	5.08	12	27.94	30.48
03	5.08	7.62	13	30.48	33.02
04	7.62	10.16	14	33.02	35.56
05	10.16	12.70	15	35.56	38.10
06	12.70	15.24	16	38.10	40.64
07	15.24	17.78	17	40.64	43.18
08	17.78	20.32	18	43.18	45.72
09	20.32	22.86	19	45.72	48.26
10	22.86	25.40	20	48.26	50.80
11	25.40	27.94			

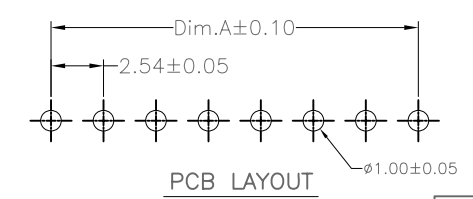

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 2.54mm Wafer R/A With Lock Type	SIZE A4
E				CHECKED: Lily Chou	UNIT: MM SCALE: 1:1			
D				APPROVAL: Chao Peng	SHEET: 1 / 1	PART NO: WFR254-XX		
C					PROJECTION:			
B								
A	12-Aug-2014	(H0032)	Ken					
REV	DATE	FILE	BY					