


Dimension Information:


Positions	Dim. A	Dim. B	Dim. C	Positions	Dim. A	Dim. B	Dim. C
02P	4.20	9.80	19.60	04P	12.60	18.20	28.00
03P	8.40	14.00	23.80	05P	16.80	22.40	32.20



Specifications:

Current Rating:9.0A AC/DC  
 Voltage Rating:600V AC/DC  
 Contact Resistance:10m Ohm. Max.  
 Insulation Resistance:1,000M Ohm. Min.  
 Withstanding Voltage:1,500V AC For One Minute  
 Operating Temperature Range:-40°C ~ +105°C  
 Materials And Finish  
 Insulator:Nylon66 (UL94V-2)  
 Insulator Color:White  
 Contact:Copper Alloy  
 Plated:Tin Plated  
 How To Order  
 WFRA42-XX

No. Of Positions  
 RA:Right Angle&Single Row

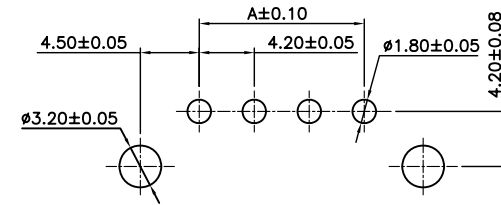

P.C.B. Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION:	SIZE
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM	4.2mm Power Wafer R/A Type	A4	
C				Lily Chou	SCALE: 1:1			
B	14-Jun-2018	Amend dim 4.9mm	Ken	APPROVAL:	SHEET: 1 / 2	PART NO:	WFRA42-XX	
A	01-SEP-2013	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					