



Specifications:  
 Current Rating:6.5A AC,DC  
 Voltage Rating:250V AC,DC  
 Contact Resistance:10mohm Max  
 Insulation Resistance:1000Mohm Min.  
 Withstanding Voltage:1500V AC/minute  
 Operating Temperature Range:-40°C~+105°C  
 Material And Finish:  
 Insulator:High Temp. Plastic(LCP UL94V-0)  
 Insulator Color:Black  
 Contact:Brass  
 Plating:Tin Plated

How To Order  
 WFRASM25-XXX-X-LK-XX

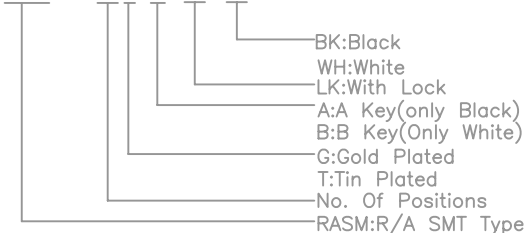

Circuits	Dimension			Circuits	Dimension		
	A	B	C		A	B	C
2	8.74	2.5	7.04	06	18.74	12.50	17.04
3	11.24	5.0	9.54	07	21.24	15.00	19.54
4	13.74	7.5	12.04	08	23.74	17.50	22.04
5	16.24	10.0	14.54				

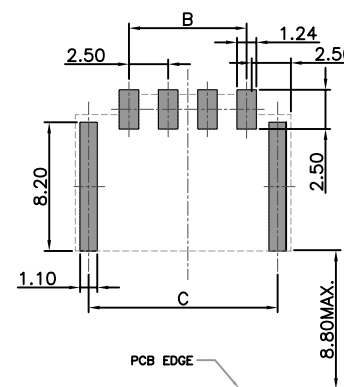

PCB Layout

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 2.5mm Wafer Single Row SMT With Lock Type	SIZE <b>A4</b>
E								
D				APPROVAL: Chao Peng	SCALE: 1:1	PART NO: WFRASM25-XXX-X-LK-XX		
C					PROJECTION:			SHEET: 1 / 1
B								
A	05-Mar-2018	(PC0001)	Ken					
REV	DATE	FILE	BY					