

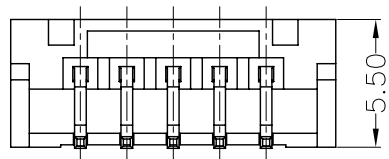



Specifications:
 Current rating:2.0A AC,DC
 Voltage rating:125V AC,DC
 Contact resistance:20m ohm.Max
 Insulation resistance:1000M ohm.Min
 Withstanding voltage:500V AC/minute
 Operating temperature range:-40°C~+85°C
 Material:
 Insulator:Nylon 6T (UL94V-0)
 Defaul Color:Beige
 Contact:Brass
 Plated:Tin Plated
 How To Order:
 WFRSM20-XX-TR

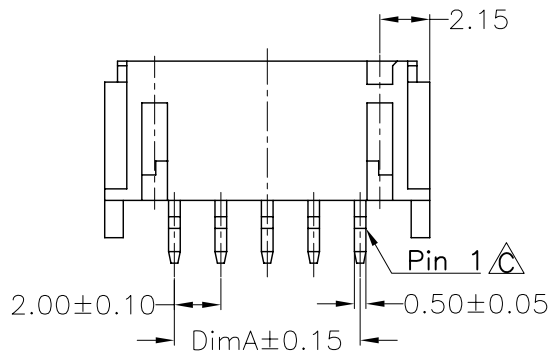

TR:Tape&Reel
 No. of Contacts
 RSM:R/A SMT Type

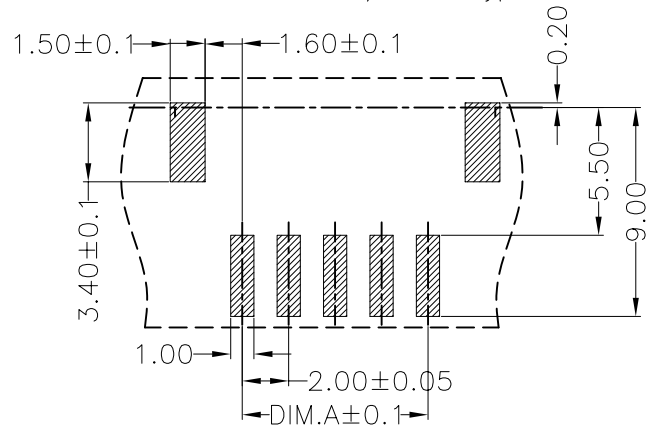

PCB Layout

RoHS Compliant

Dimension:

Contacts	DimA	DimB	DimC	Contacts	DimA	DimB	DimC
02	2.00	8.00	4.75	07	12.00	18.00	14.75
03	4.00	10.00	6.75	08	14.00	20.00	16.75
04	6.00	12.00	8.75	09	16.00	22.00	18.75
05	8.00	14.00	10.75	10	18.00	24.00	20.75
06	10.00	16.00	12.75				

F				DRAWN:	GENERAL TOLERANCE:		
E				Ken	.X=±0.20 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C				Lily Chou	SCALE: 1:1	2.0mm Wafer R/A SMT Type	A4
B				APPROVAL:	SHEET: 1 / 1	PART NO:	
A	12-Oct-2014	(H0001)	Ken	Chao Peng	PROJECTION:	WFRSM20-XX-TR	
REV	DATE	FILE	BY				