

Dimension:

Circuits	Dimension:			Circuits	Dimension:		
	A	B	C		A	B	C
02	2.00	6.00	0.75	09	16.00	20.00	14.00
03	4.00	8.00	2.00	10	18.00	22.00	16.00
04	6.00	10.00	4.00	11	20.00	24.00	18.00
05	8.00	12.00	6.00	12	22.00	26.00	20.00
06	10.00	14.00	8.00	13	24.00	28.00	22.00
07	12.00	16.00	10.00	14	26.00	30.00	24.00
08	14.00	18.00	12.00	15	28.00	32.00	26.00


Specifications:

Current rating: 2.0A AC, DC
Voltage rating: 125V AC, DC
Contact resistance: 20m ohm Max
Insulation resistance: 1000M ohm Min
Withstanding voltage: 500V AC/minute
Operating temperature range: -40°C ~ +85°C
Material:

Insulator: Nylon66 (UL94V-0)
Default color: White
Contact: Brass
Plated: Tin Plated

How To Order:
WFVJ20-XX-XX

Standard Color: White
BK: Black / RD: Red / BU: Blue /
GR: Grey / YL: Yellow
Number of Circuits
SJ: Straight

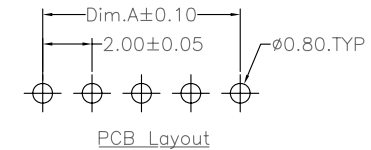

F				DRAWN: Ken	GENERAL TOLERANCE: .X = ± 0.20 .XX = ± 0.15		DESCRIPTION: 2.0mm Wafer Single Row Straight Type	SIZE A4
E								
D				APPROVAL: Chao Peng	SCALE: 1:1	PART NO: WFVJ20-XX-XX		
C					APPROVAL: Chao Peng			SHEET: 1 / 1
B					PROJECTION:			
A	11-Oct-2013	(PC0001)	Ken					
REV	DATE	FILE	BY					