


Specifications:

Current Rating:3.0A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:20mohm Max
 Insulation Resistance:1000Mohm Min.
 Withstanding Voltage:1000V AC/minute
 Operating Temperature Range:-40°C~+85°C
 Material And Finish:
 Insulator:Nylon 66 UL94V-0
 Insulator Color:Beige
 Contact:Brass
 Plated:Tin Plated
 How To Order:
 WFVM25-XX

— No. Of Contacts
 — VM: Straight Type

Dimension:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
2	2.50	7.50	9	20.00	25.00
3	5.00	10.00	10	22.50	27.50
4	7.50	12.50	11	25.00	30.00
5	10.00	15.00	12	27.50	32.50
6	12.50	17.50	13	30.00	35.00
7	15.00	20.00	14	32.50	37.50
8	17.50	22.50	15	35.00	40.00

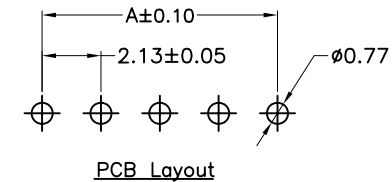

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 2.5mm Wafer Straight Type	SIZE A4
E				Ken	.X = ±0.20 .XX = ±0.15			
D				CHECKED:	UNIT: MM	PART NO: WFVM25-XX		
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 1			
A	01-SEP-2013	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					