

Specifications:

Current Rating:1.0 Amps

Voltage Rating:50V AC/DC

Contact Resistance:20mohm max.

Insulation Resistance:1,000M ohm min.

Withstanding Voltage:500V For One Minute

Operating Temperature:-25°C ~ +105°C

Material

Insulator:High Temp.Plastic(Nylon 6T UL94V-0)






Standard Color:Black

Contact:Copper Alloy

Plating:Gold Plated

How To Order

PHRDSM127-XXG-3853CR

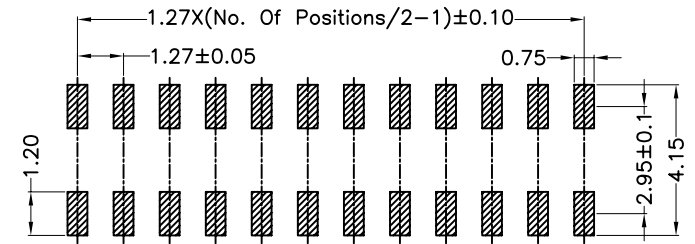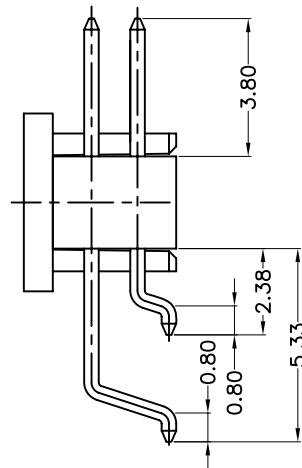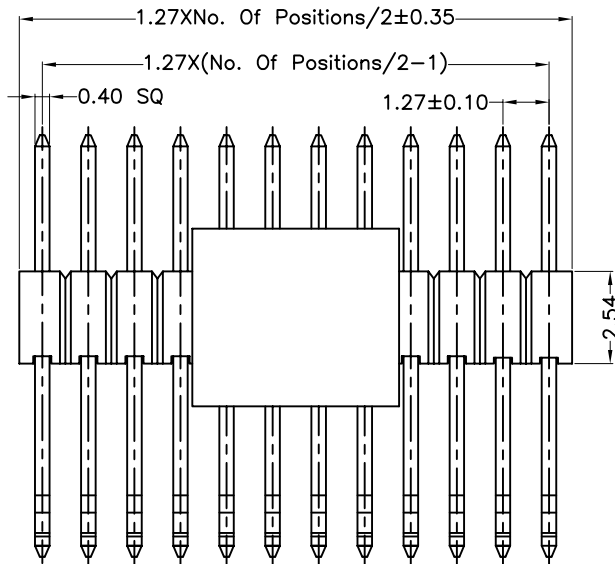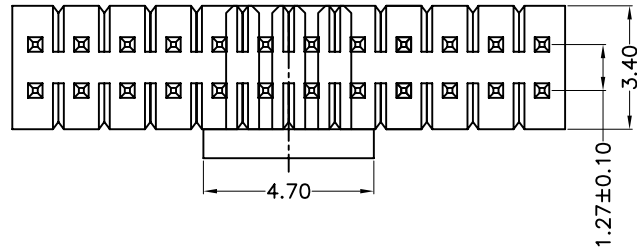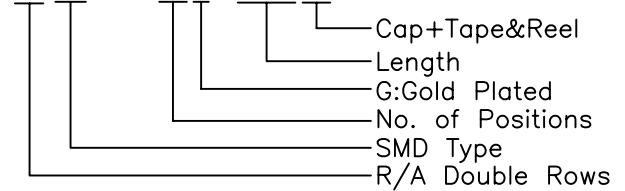

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 1.27mm Pin Header R/A SMT Type	SIZE <b>A4</b>
E			Ken	.X=±0.20 .XX=±0.15				
D			CHECKED:	UNIT: MM				
C			Lily Chou	SCALE: 1:1				
B			APPROVAL:	SHEET: 1 / 1	PART NO:	PHRDSM127-XXG-3853CR		
A	03-Mar-2023	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					