



Circuits	Dimension		Circuits	Dimension	
	A	B		A	B
2	6.7	—	14	24.7	18.0
4	9.7	3.0	16	27.7	21.0
6	12.7	6.0	18	30.7	24.0
8	15.7	9.0	20	33.7	27.0
10	18.7	12.0	22	36.7	30.0
12	21.7	15.0	24	39.7	33.0

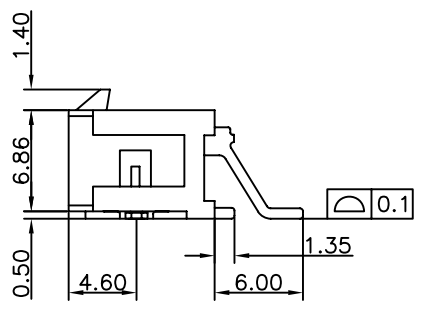

Specifications:
 Current Rating:5.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:10m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:AC 1500V AC/minute
 Operating Temperature Range:-25°C ~ +105°C
 Material and Finish
 Insulator:High Temp. Plastic (LCP UL94V-0)
 Insulator Color:Black
 Contact:Copper Alloy
 Finish:Tin Plated

How to Order
 WF1RSM30-XXT-TR

Tape & Reel
 Tin Plated
 No.Of Positions
 R/A SMD Type

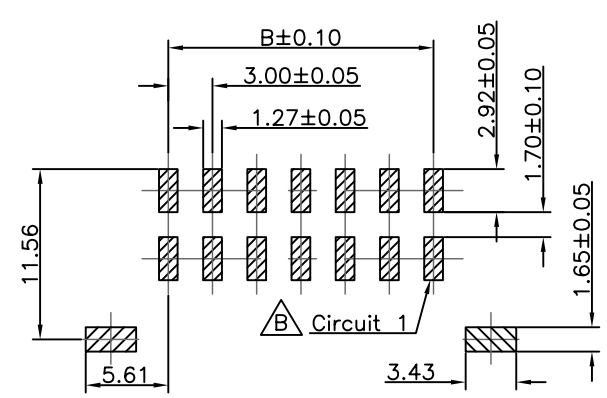

PCB Layout

RoHS Compliant

F				DRAWN: Ken
E				
D				CHECKED: Lily Chou
C				
B				APPROVAL: Chao Peng
A	10-Feb-2020	(PC0001)	Ken	
REV	DATE	FILE	BY	

GENERAL TOLERANCE:
 .X=±0.20
 .XX=±0.15

UNIT: MM
 SCALE: 1:1
 SHEET: 1 / 2
 PROJECTION:

HOYATO
Connector supplies

DESCRIPTION:
 3.0mm Power Wafer R/A SMT Type

PART NO:
 WF1RSM30-XXT-TR

SIZE
A4