

1

2

3

4




5

A

B

C


D

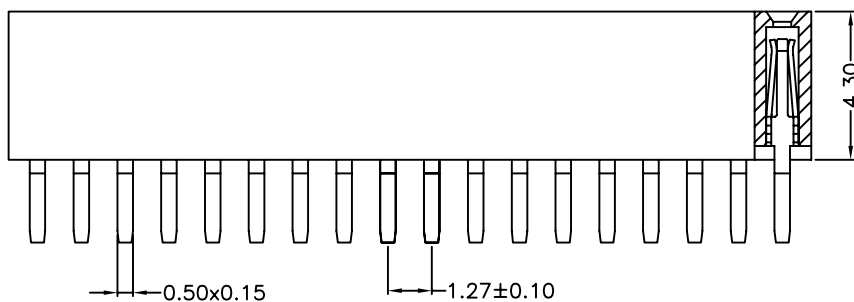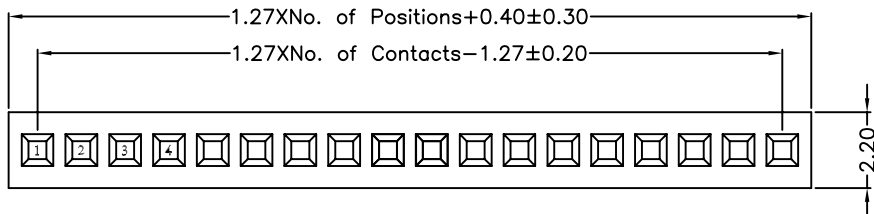

Specifications:

Current rating:1.0A AC/DC
 Voltage rating:50V AC/DC
 Contact resistance:20m ohm max.
 Insulation Resistance:1000M ohm min.
 Withstanding voltage:500V AC/minute
 Operating Temperature range:-25°C to +105°C
 Material:
 Insulator:High Temp.Plastic(UL94V-0)
 Insulator Color:Black
 Contact:Phosphor Bronze
 Plated:Gold Plated
 How To Order
 PSV127-XXG

G:Gold Plated
 No. Of Contacts
 Straight Dip Type

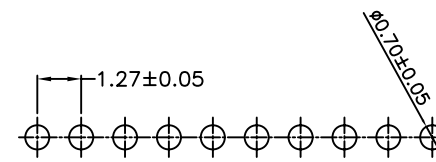

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:			DESCRIPTION: 1.27mm PCB Socket 4.3mm Height Dip Type	SIZE A4
E			Ken	.X=±0.20 .XX=±0.15					
D				CHECKED:	UNIT: MM	PART NO: PSV127-XXG			
C			Lily Chou	SCALE: 1:1					
B				APPROVAL:	SHEET: 1 / 1				
A	15-SEP-2015	(PC0001)	Ken	Chao Peng	PROJECTION:				
REV	DATE	FILE	BY						