

Specifications:


Current rating:1.0A AC,DC
 Voltage rating:150V AC,DC
 Contact resistance:30m ohm.Max
 Insulation resistance:500M ohm.Min
 Withstanding voltage:250V AC/minute
 Operating temperature range:-40°C~+85°C
 Material:

Insulator:High Temp. Plastic(PA46 UL94V-0)
 Insulator Color:Ivory
 Contact:Brass
 Plated:Tin Plated
 How To Order:
 WFR125-XX

— No. of Positions
 — R/R/A Type

Dimension:

Circuits	Dimension:		Circuits	Dimension:	
	A	B		A	B
02	1.25	3.75	10	12.50	15.00
03	2.50	5.00	11	13.75	16.25
04	3.75	6.25	12	15.00	17.50
05	5.00	7.50	13	16.25	18.75
06	6.25	8.75	14	17.50	20.00
07	7.50	10.00	15	23.75	26.35
08	8.75	11.25			
09	10.00	12.50			

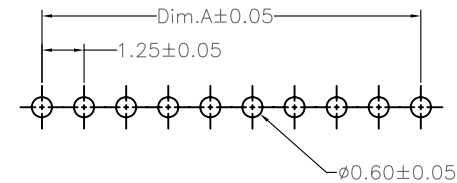

PCB LAYOUT

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 1.25mm Wafer R/A Type	SIZE A4
E								
D				APPROVAL: Chao Peng	SCALE: 1:1	PART NO: WFR125-XX		
C					SHEET: 1 / 1			
B					PROJECTION:			
A	01-SEP-2021	(H0001)	Ken					
REV	DATE	FILE	BY					