
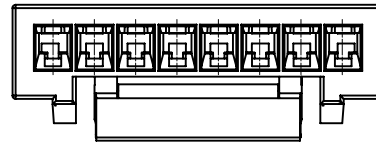



02P-07P



08P-16P

Specification:

Current Rating: 1.0A AC,DC  
 Voltage rating: 125V AC,DC  
 Contact Resistance: 20m Max  
 Insulation Resistance: 100M Min  
 Withstanding Voltage:250V AC/Minute  
 Temperature Range: -40°C to +85°C

Material:

Insulator: High Temp Plastic (Nylon 66 UL94V-0)  
 Insulator Color:White

How To Order  
 HBS125-XX-LK

LK: Lock Type  
 No.Of Position  
 Socket Housing

PIN	DIM. (mm)			PIN	DIM. (mm)		
	A	B	C		A	B	C
02	1.25	3.75	2.20	10	11.25	13.75	8.20
03	2.50	5.00	3.20	11	12.50	15.00	8.20
04	3.75	6.25	4.25	12	13.75	16.25	8.20
05	5.00	7.50	4.25	13	15.00	17.50	8.20
06	6.25	8.75	6.25	14	16.25	18.75	8.20
07	7.50	10.00	6.25	15	17.50	20.00	8.20
08	8.75	11.25	6.25	16	18.75	21.25	8.20
09	10.00	12.50	6.25				

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 1.25mm Socket Housing With Lock	SIZE <b>A4</b>
E								
D				APPROVAL: Chao Peng	SCALE: 1:1	PART NO: HBS125-XX-LK		
C					PROJECTION:			
B								
A	01-SEP-2016	(H0001)	Ken					
REV	DATE	FILE	BY					