


PCB Layout

Specifications:
 Current Rating:1.0 Amps
 Voltage Rating:50V AC/DC
 Contact Resistance:20mohm max.
 Insulation Resistance:1,000M ohm min.
 Withstanding Voltage:500V For One Minute
 Operating Temperature:-25°C ~ +105°C
 Material

Insulator:High Temp.Plastic(Nylon 6T UL94V-0)
 Standard Color:Black
 Contact:Copper Alloy
 Plating:Gold Plated
 How To Order
 PHDSM127-XXG-4030CR

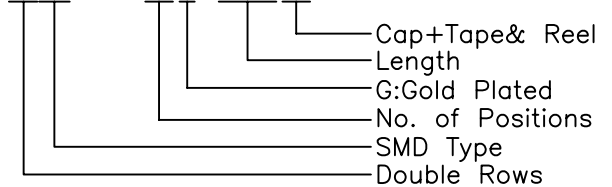

RoHS Compliant

F			
E			
D			
C			
B	20-Sep-2021	Amend Cap Dim	Ken
A	20-Apr-2020	(PC0001)	Ken
REV	DATE	FILE	BY

DRAWN: Ken
 CHECKED: Lily Chou
 APPROVAL: Chao Peng

GENERAL TOLERANCE:
 .X=±0.20
 .XX=±0.15
 UNIT: MM
 SCALE: 1:1
 SHEET: 1 / 1
 PROJECTION:

HOYATO
 Connector supplies
 DESCRIPTION: 1.27mm Pin Header SMT Type
 PART NO: PHDSM127-XXG-4030CR

SIZE
A4