

Specifications:

Current rating:1.0 Amps

Voltage rating:50V AC/DC

Contact resistance:20mohm max.

Insulation resistance:1,000Mohm min.

Withstanding Voltage:500V For One Minute

Operating Temperature:-25°C ~ +105°C

Material

Insulator:High Temp.Plastic(Nylon 6T UL94V-0 )



Standard Color:Black

Contact:Copper Alloy

Plated:Tin Plated

How To Oorder

PHVD127-XXG-1680

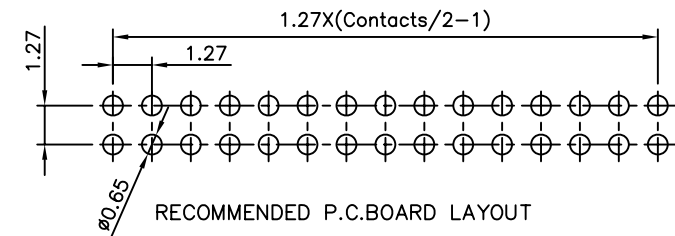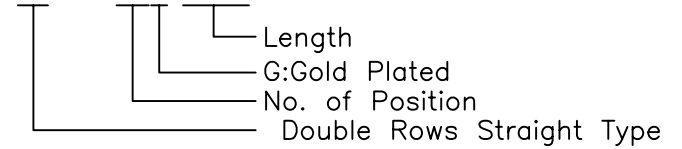

F				DRAWN:	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 1.27mm Pin Header Double Row Straight Type	SIZE <b>A4</b>
E			Ken					
D			CHECKED:					
C			Lily Chou					
B			APPROVAL:					
A	24-Aug-2017	(PC0001)	Ken	Chao Peng	UNIT: MM	PART NO:	PHVD127-XXG-1680	
REV	DATE	FILE	BY		SCALE: 1:1			
					SHEET: 1 / 1			
					PROJECTION:			