

Specifications:

Current rating:1.0 Amps

Voltage rating:50V AC/DC

Contact resistance:20mohm max.

Insulation resistance:1,000Mohm min.

Withstanding Voltage:500V For One Minute

Operating Temperature:-25°C ~ +105°C

Material

Insulator:High Temp.Plastic(Nylon 6T UL94V-0 )



Standard Color:Black

Contact:Copper Alloy

Plated:Tin Plated

How To Oorder

PHVD127-XXG-930

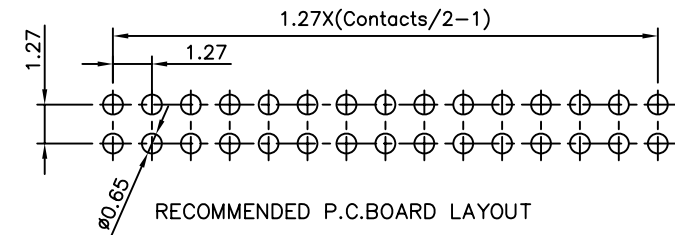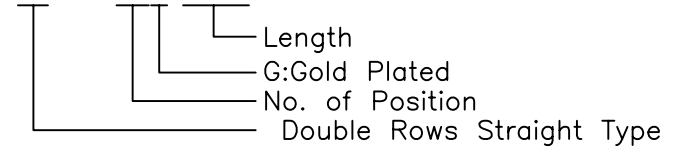

DESCRIPTION: 1.27mm Pin Header  
Double Row Straight Type

PART NO: PHVD127-XXG-930

SIZE

**A4**

F				DRAWN:	GENERAL TOLERANCE:
E				Ken	.X=±0.20
D				CHECKED:	.XX=±0.15
C				Lily Chou	UNIT: MM
B				APPROVAL:	SCALE: 1:1
A	26-May-2022	(PC0001)	Ken	Chao Peng	SHEET: 1 / 1
REV	DATE	FILE	BY	PROJECTION:	