



2PIN



3PIN




4PIN

Specifications:

Current Rating:9.0A AC/DC
 Voltage Rating:600V AC/DC
 Contact Resistance:10m Ohm. Max.
 Insulation Resistance:1,000M Ohm. Min.
 Withstanding Voltage:1,500V AC For One Minute
 Operating Temperature Range:-40°C ~ +105°C
 Materials And Finish
 Insulator:Nylon66 (UL94V-2)
 Insulator Color:White
 Contact:Copper Alloy
 Plated:Tin Plated


How To Order

WFVA42-XX-XX

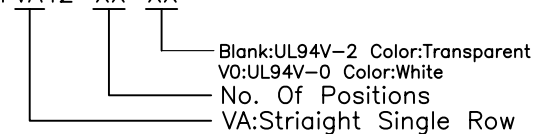

Dimension Information:

Pos.	Dim.A	Dim.B
02	—	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20

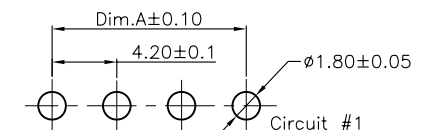

P.C.B. Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 4.2mm Power Wafer Straight Type	SIZE A4
E				Ken	.X = ±0.20 .XX = ±0.15			
D				CHECKED:	UNIT: MM			
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 2	PART NO:	WFVA42-XX	
A	01-SEP-2013	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					